

Special Application Cables


WEST PENN WIRE

PTZ Security Video

Minimax & RG59/U Type Composite PTZ (Pan Tilt Zoom) Plenum

Applications:

- CCTV/ Data/ Power
- Security Baseband Video
- Flame Rating: UL1685

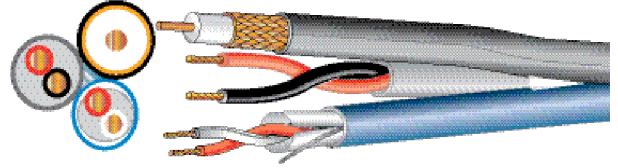

Standard spool size 1000ft.

Catalog No. NEC Type	Cable Types	Conductor Type & Nom. D.C.R	Insulation Type & Thickness Inches	Shielding & % Coverage	Jacket Type	Nom. O.D. Inches	Nom. Capacitance	Nom. VP	Nom. Imp. Ω	Jacket Color
PTZ25825	CCTV Coaxial Minimax	25 AWG (Solid) BC 30 Ω/M	Foam FEP .078	Bare Copper Braid 95%	Plenum PVC	.146	16.2 pf/ft	82%	75Ω	Black
	Data Control Cable	1 Pair 22 AWG (7x30) TC	FEP .010	Al. Foil 100% with drain wire	Plenum PVC	.120	25 pf/ft* 45 pf/ft**	69%	55Ω	Blue
CMP	Power Control Cable	1 Pair 18 AWG (7x26) BC	Plenum PVC .010	None	Plenum PVC	.138	--	--	--	Gray

PTZ25825 - Nom. O.D. .342"

Catalog No. NEC Type	Cable Types	Conductor Type & Nom. D.C.R	Insulation Type & Thickness Inches	Shielding & % Coverage	Jacket Type	Nom. O.D. Inches	Nom. Capacitance	Nom. VP	Nom. Imp. Ω	Jacket Color
PTZ25815	CCTV Coaxial RG59/U	20 AWG (Solid) BC 10.1 Ω/M'	FEP .138	Bare Copper Braid 95%	Plenum PVC	.207	16.2 pf/ft	82%	75Ω	Black
	Data Control Cable	1 Pair 18 AWG (7x26) TC	FEP .010	100% Al. Foil with drain wire	Plenum PVC	.148	30 pf/ft* 54 pf/ft**	69%	45Ω	Blue
CMP	Power Control Cable	1 Pair 18 AWG (7x26) BC	Plenum PVC .010	None	Plenum PVC	.138	--	--	--	Gray

PTZ25815 - Nom. O.D. .362"

Cable Types	Conductor Colors	Jacket Colors
CCTV Coaxial	--	Black
Data Control Cable	1.Black, 2. Red	Blue
Power Control Cable	1. Black, 2. Red	Gray



Notes:

Standard Spool size 1000ft, spools are one piece, but lengths may vary +/- 10%
 PE- Polyethylene
 Bifoil is an aluminum polyester aluminum tape with 100% coverage
 100% Sween Tested