


# SERIES FF - 6201

Braided Flexible Metal Flanged Connectors (321 Stainless Steel Hose with 304 Stainless Steel Braid and Carbon Steel Plate Flanges).

**Table 1: Sizes • Offset • Working Pressures • Weights**

Expansion Joint Size: ID X Length	Stock	Lateral Offset		Working Press (PSI)		Approx. Unit Ship Weight
		Inter-mittent	Perma-nent	@70 °F	@300 °F	
2 x 9	S	1/8"	3/8"	455	400	9
2 x 12	S	3/4"	1"	455	400	12
2 1/2 x 9	S	1/8"	3/8"	345	303	13
2 1/2 x 10	S	1/8"	3/8"	345	303	13
2 1/2 x 10 1/4	S	3/8"	3/4"	345	303	13
2 1/2 x 12	S	3/4"	1"	345	303	13
3 x 9	S	1/8"	3/8"	289	254	14
3 x 10	S	1/8"	3/8"	289	254	14
3 x 10 5/8	S	3/8"	3/4"	289	254	14
3 x 14	S	3/4"	1"	289	254	15
4 x 9	S	1/8"	3/8"	300	264	18
4 x 10	S	1/8"	3/8"	300	264	18
4 x 11 3/4	S	3/8"	3/4"	300	264	19
4 x 16	S	3/4"	1"	300	264	20
5 x 11	S	1/8"	3/8"	220	193	25
5 x 12	S	1/8"	3/8"	220	193	25
5 x 13 5/8	S	3/8"	3/4"	220	193	27
5 x 18	S	3/4"	1"	220	193	30
6 x 11	S	1/8"	3/8"	200	176	28
6 x 12	S	1/8"	3/8"	200	176	28
6 x 14 1/8	S	3/8"	3/4"	200	176	30
6 x 20	S	3/4"	1"	200	176	34
8 x 12	S	1/8"	3/8"	190	167	52
8 x 13	S	1/8"	3/8"	190	167	52
8 x 15 3/8	S	3/8"	3/4"	190	167	64
8 x 22	S	3/4"	1"	190	167	65
10 x 13	S	1/8"	3/8"	165	145	65
10 x 14	S	1/8"	3/8"	165	145	65
10 x 17 3/4	S	3/8"	3/4"	165	145	68
10 x 24	S	3/4"	1"	165	145	75
12 x 14	S	1/8"	3/8"	125	110	105
12 x 15	S	1/8"	3/8"	125	110	105
12 x 18 3/8	S	3/8"	3/4"	125	110	110
12 x 26	S	3/4"	1"	125	110	113
14 x 14	S	1/8"	3/8"	105	92	115
14 x 15	S	1/8"	3/8"	105	92	115
14 x 20	X	3/8"	3/4"	105	92	119
14 x 28	X	3/4"	1"	105	92	126

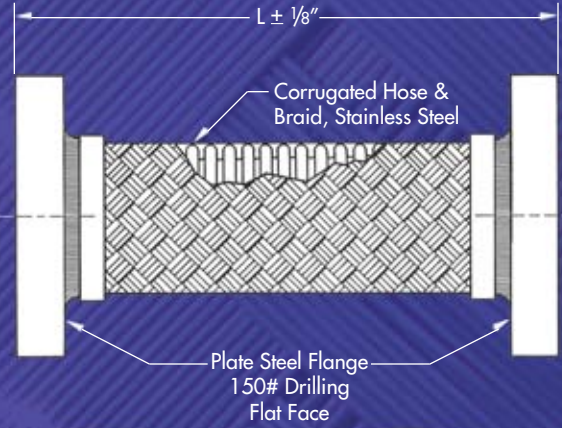

NOTES: 1. "S" Indicates stocked item.  
2. "X" Denotes 1-2 week shipment time.