
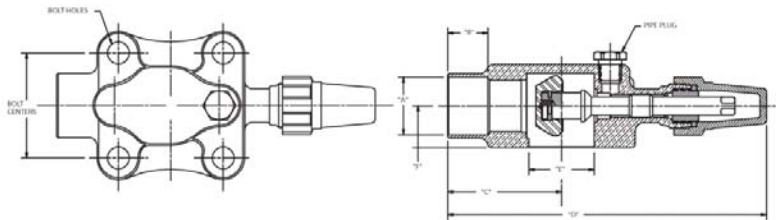


# Brass Compressor Valves

## Four-Bolt Mounting, Solder

### Features:

- Maximum working pressure (PS): 700 psig, 48 bar
- Working temperature range (TS): -40°F/300°F, -40°C/149°C
- Compatible with all CFC, HCFC and HFC refrigerants and oils
- UL/cUL Recognized, CE Certified
- 100% tested
- Asbestos-free valve packing
- Valve openings designed for maximum flow and minimum pressure drop
- Flat Gasket Surface



### References

- \* Valve kit includes valve, gasket and bolts
- \*\* Replacement kit contains components to pack stem (pack gland, packing and pack washer)
- \*\*\* Cap and cap gasket kit
- \*\*\*\* Seal cap and o-ring kit
- \*\*\*\*\* O-ring included

### Dimensions

Valve Part Number	Valve Kit *	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)	Bolt Centers (in)	Bolt Hole Diameter (in)	Pipe Plug Size (in)	Seat Position	Valve Wt (lb)	Kit Wt (lb)
B 32807	A 17532	1 1/8	0.9	2.72	7.61	1.56	1	2.5	.53	1/4	Mid	4.00	4.47
B 32808	A 17533	1 3/8	0.96	2.72	7.61	1.56	1	2.5	.53	1/4	Mid	3.98	4.67
B 32930	A 17534	1 5/8	1.1	2.88	7.89	1.81	1.03	2.5	.53	1/4	Mid	4.13	4.67

### Metric Dimensions

Valve Part Number	Valve Kit *	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Bolt Centers (mm)	Bolt Hole Diameter (mm)	Pipe Plug Size (in)	Seat Position	Valve Wt (kg)	Kit Wt (kg)
B 32807	A 17532	29	23	69	193	40	25	64	13	1/4	Mid	1.81	2.03
B 32808	A 17533	35	24	69	193	40	25	64	13	1/4	Mid	1.80	2.12
B 32930	A 17534	41	28	73	200	46	26	64	13	1/4	Mid	1.87	2.12

### Torque To Seal

Front Seat		Back Seat		Pack Gland		Pipe Plug	Plastic Cap	Brass Cap		Steel Cap		Cast Iron Cap
ft-lb	N-m	ft-lb	N-m	ft-lb	N-m			ft-lb	N-m	ft-lb	N-m	
22 - 40	30 - 54	25 - 45	34 - 61	10 - 15	14 - 20	2 - 3 Threads Exposed	Hand Tight	40 - 50	54 - 68	NA	NA	NA

### References

Valve Part Number	Body	Standard Seal Cap			Replacement Seal Cap			Replacement Kit**	Valve Kit *	Manufacturer Reference	
		Material	Seal Cap*****	Kit*****	Plastic*****	Brass*****	Steel			Cast Iron	Carrier
B 32807	F 27950	Plastic	P 34632	P 35915	P 34632	A 15099		A 17418	A 17532	06DA660-063	
B 32808	F 27955	Plastic	P 34632	P 35915	P 34632	A 15099		A 17418	A 17533	06DA660-065	
B 32930	F 29201	Plastic	P 34632	P 35915	P 34632	A 15099		A 17418	A 17534	06DA660-090	



RoHS Compliant. Comply with ISO 9001 Standards.

12/9/2010

121 Rogers Street • Hartsville, TN 37074  
(800) 251-8983 or (615) 374-2124  
FAX (800) 529-0884 or (615) 374-0932

www.muellerindustries.com