


VS-42HC/VS-44HC

4x2, 4x4 Component Video & Digital Audio Matrix Switchers



SWITCHERS & ROUTERS

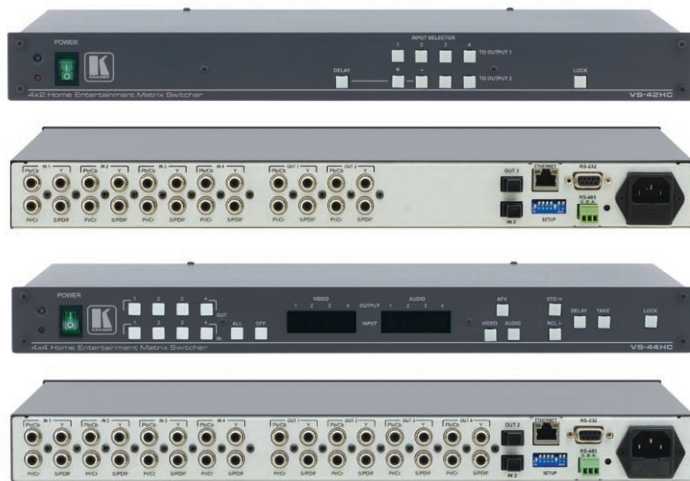

The **VS-42HC** & **VS-44HC** are high-performance matrix switchers for component video and S/PDIF audio signals. Designed primarily for home entertainment applications, they can route any or all inputs to any or all outputs simultaneously.

FEATURES

- High Bandwidth - 200MHz (-3dB).
- HDTV Compatible.
- TOSLINK® Audio Capability - Audio input 2 can accept either S/PDIF or TOSLINK® audio (selected via DIP-switches). If selected, both S/PDIF and TOSLINK® audio are simultaneously available on audio output 2.
- Sampling Rates - Up to 192kHz.
- Programmable Audio Delay - Up to 999ms (depending on sample rate).
- Audio Breakaway Switching - VS-44HC only.
- Memory Locations - Stores multiple switches as presets (salvos) to be recalled and executed as needed. VS-44HC only.
- Take Button - Executes multiple switches all at once. VS-44HC only.
- Flexible Control Options - Front panel, RS-485, RS-232 (K-Router™ Windows®-based software is included), Ethernet, IR remote (included).
- Front Panel Lockout.
- Worldwide Power Supply - 100-240V AC.
- Standard 1.9" Rack Mount Size - 1U. Rack "ears" included.

TECHNICAL SPECIFICATIONS

VIDEO INPUTS:	4 sets of component video (Y, Pb/Cb, Pr/Cr), 1Vpp, 0.7Vpp, 0.7Vpp/75Ω on RCA connectors.
VIDEO OUTPUTS:	2/4 (VS-42HC)/4 (VS-44HC) sets of component video (Y, Pb/Cb, Pr/Cr), 1Vpp, 0.7Vpp, 0.7Vpp/75Ω on RCA connectors.
VIDEO MAX. OUTPUT LEVEL:	2.3Vpp.
VIDEO BANDWIDTH (-3dB):	200MHz, fully loaded.
VIDEO DIFF. GAIN:	0.08%.
VIDEO DIFF. PHASE:	0.77Deg.
VIDEO K-FACTOR:	<0.05%.
VIDEO S/N RATIO:	73dB weighted.
VIDEO CROSSTALK (all hostile):	-53dB @5MHz.
VIDEO COUPLING:	DC.
AUDIO INPUTS:	4 S/PDIF digital audio, on RCA connectors; 1 TOSLINK® optical.
AUDIO OUTPUTS:	2 (VS-42HC)/4 (VS-44HC) S/PDIF digital audio, on RCA connectors; 1 TOSLINK® optical.
S/PDIF SAMPLE RATE:	Up to 192kHz.
AUDIO RESOLUTION:	Up to 24 bits.
JITTER:	<1.5ns (50Hz to 100kHz) without delay, <3.5ns (50Hz to 100kHz) with delay.
MAXIMUM DELAY TIME FOR CHANNEL 2:	32kHz - 999ms; 44.1kHz - 720ms; 48kHz - 680ms; 96kHz - 340ms.
DELAY RESOLUTION:	1ms.
CONTROLS:	Front panel buttons, Ethernet, RS-232, RS-485, IR remote control.
POWER SOURCE:	100-240V AC, 50/60Hz; 16VA.
DIMENSIONS:	19" x 7" x 1U W, D, H, rack mountable.
WEIGHT:	2.7kg (6lbs) approx.
ACCESSORIES:	Power cord, null-modem adapter, Windows®-based Kramer control software, Windows®-based Ethernet Configuration Manager and Virtual Serial Port Manager, infrared remote control transmitter, rack "ears".

