
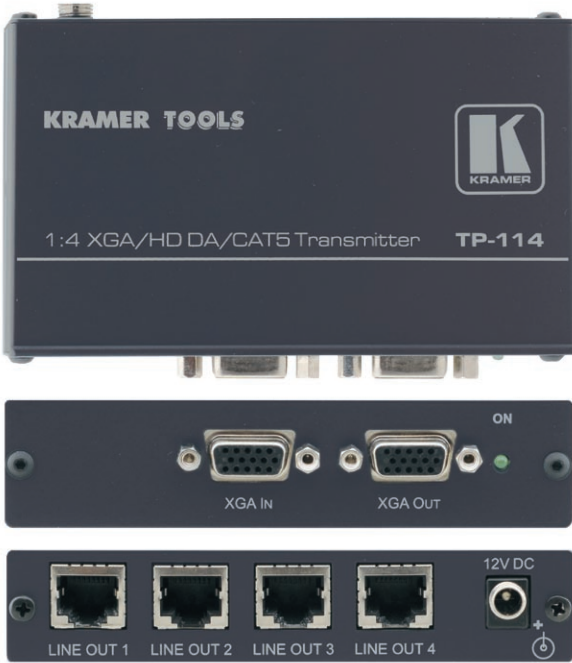


TP-114


1:4 Computer Graphics Video & HDTV over Twisted Pair Transmitter & Distribution Amplifier



The **TP-114** is a high-performance distribution amplifier for computer graphics video or HDTV signals. It converts a computer graphics video or HDTV signal on a 15-pin HD connector to four identical twisted pair signals.

FEATURES

- HDTV Compatible.
- Max. Resolution - WUXGA & 1080p.
- Looping Input.
- Sync Polarity Settings - H & V switches for improved HDTV compatibility.
- Power Connect™ System - A single connection to the transmitter or the receiver powers both units when the devices are within 150ft (50m) of each other.
- System Range - Up to 100m (320ft). Greater distances possible depending on signal resolution and cable.
- Cable - Uses UTP (unshielded twisted pair) or STP (shielded twisted pair) cable such as CAT 5.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter.

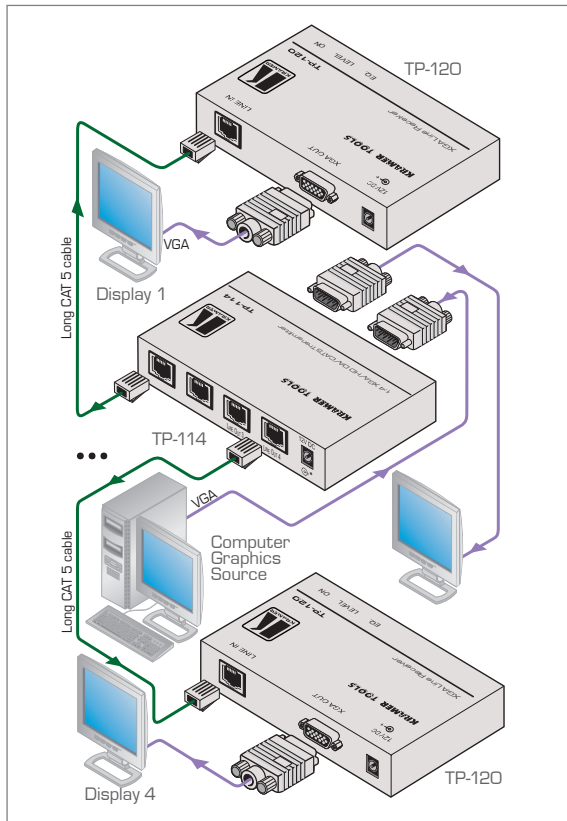

TECHNICAL SPECIFICATIONS

INPUT:	1 XGA on a 15-pin HD (F) connector.
OUTPUTS:	1 XGA on a 15-pin HD (F) connector; 4 RJ-45 OUT connectors.
MAX. OUTPUT LEVEL:	1.8Vpp (XGA), 1.6Vpp (CAT 5).
MAX. RESOLUTION:	WUXGA & 1080p.
DIFF. GAIN:	0.03% (XGA), 7% (CAT 5).
DIFF. PHASE:	0.05Deg (XGA), 0.08Deg (CAT 5).
K-FACTOR:	<0.05% (XGA), 0.3% (CAT 5).
S/N RATIO:	75dB (XGA), 73dB (CAT 5).
CONTROLS:	2 switches for sync inversion.
COUPLING:	DC (XGA), AC (CAT 5).
POWER SOURCE:	12V DC, 880mA.
DIMENSIONS:	12cm x 7.15cm x 2.76cm (4.7" x 2.8" x 1.08") W, D, H.
WEIGHT:	0.3kg (0.67lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-3T 19" rack adapter.



RANGE EXTENDERS & REPEATERS

