

VM-3VN


1:3 Composite Video Distribution Amplifier



The **VM-3VN** is a distribution amplifier for composite video signals. The unit takes one input, provides correct buffering and isolation and distributes the signal to three identical outputs.

FEATURES

- High Bandwidth - 430MHz (-3dB).
- Selectable Input Signal Termination.
- Level (Gain) & EQ (Peaking) Controls.
- Compact Kramer TOOLS™ - 3 units can be rack mounted side-by-side in a 1U rack space with the optional RK-3T rack adapter

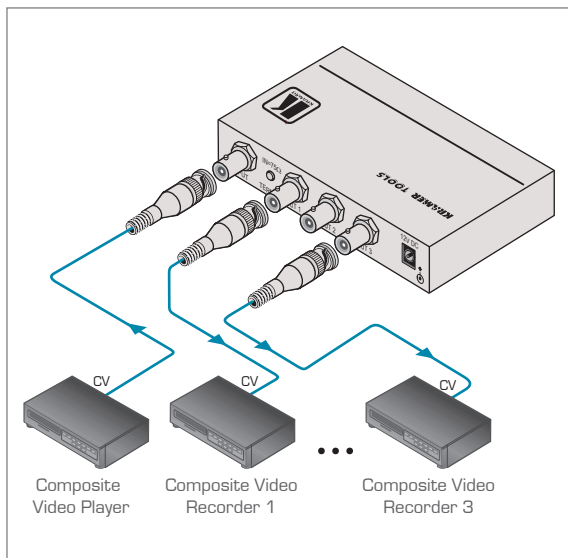

TECHNICAL SPECIFICATIONS

INPUT:	1 composite video on a BNC connector.
OUTPUTS:	3 composite video on BNC connectors.
MAX. OUTPUT LEVEL:	1.8Vpp.
BANDWIDTH (-3dB):	430MHz.
DIFF GAIN:	0.12%.
DIFF PHASE:	0.03Deg.
K-FACTOR:	<0.05%.
S/N RATIO:	74.3dB.
CONTROL:	Level: -1.6 to +6dB; Equalization: 0 to +6dB.
COUPLING:	AC.
POWER SOURCE:	12V DC, 27mA.
DIMENSIONS:	11.7cm x 6cm x 3.2cm (4.6" x 2.4" x 1.3") W, D, H.
WEIGHT:	0.28kg (0.62lbs) approx.
ACCESSORIES:	Power supply.
OPTIONS:	RK-3T 19" rack adapter.

