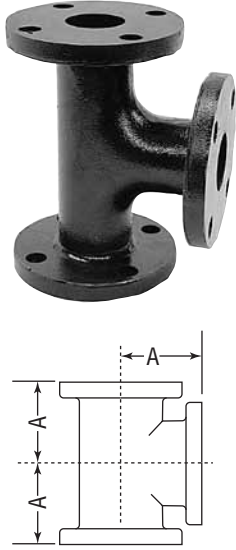


## Cast Iron Flanged Fittings

Class 125 (Standard)

FIGURE 811 Flanged Tee	Size		A		AA		Flange Diameter		Thickness				Unit Weight			
	NPS	DN	in	mm	in	mm	in	mm	Flange		Wall		Black		Galv.	
									in	mm	in	mm	lbs	kg	lbs	kg
	1½	40	4	102	8	203	5	127	9/16	14	5/16	8	15.00	6.80	–	–
	2	50	4½	114	9	229	6	152	5/8	16	5/16	8	21.00	9.52	21.00	9.52
	2½	65	5	127	10	254	7	178	11/16	17	5/16	8	30.00	13.61	30.00	13.61
	3	80	5½	140	11	279	7½	191	¾	19	¾	10	37.00	16.78	37.00	16.78
	4	100	6½	165	13	330	9	229	15/16	24	½	13	64.00	29.02	64.00	29.02
	5	125	7½	191	15	381	10	254	15/16	24	½	13	81.00	36.73	–	–
	6	150	8	203	16	406	11	279	1	25	9/16	14	105.00	47.62	105.00	47.62
	8	200	9	229	18	457	13½	343	1⅛	29	5/8	16	165.00	74.83	165.00	74.83
	10	250	11	279	22	559	16	406	1¾	30	¾	19	270.00	122.45	270.00	122.45
	12	300	12	305	24	610	19	483	1¼	32	13/16	22	380.00	172.34	380.00	172.34

Note: See page 62 for pressure-temperature ratings.