



MIL-D1/DS

DEEP SEARCH UNDERGROUND METAL DETECTOR

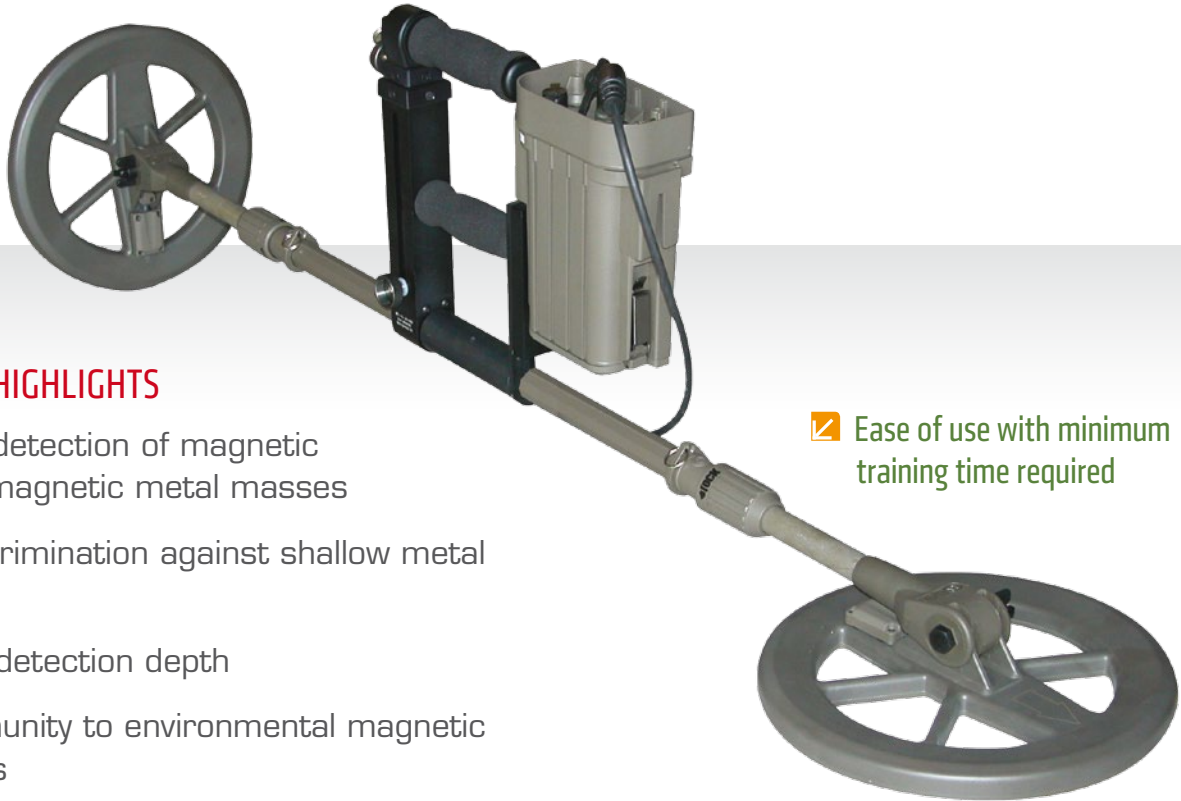

FEATURE HIGHLIGHTS

- Effective detection of magnetic and non-magnetic metal masses
- High Discrimination against shallow metal clutter
- Superior detection depth
- Total immunity to environmental magnetic anomalies
- Static and dynamic detection independent of the detector's rate of advance
- Completely digital electronics, with in-the-field program memory upgrade capability
- Extremely high level of electrical and mechanical reliability
- Operation monitored by a microcomputer-controlled autodiagnostic system with audible warning signals

 Ease of use with minimum training time required



 View of the MIL-D1/DS inside its transportation case

The CEIA MIL-D1/DS Metal Detector

is an active EMI device based on transmission of an alternating, low-frequency magnetic field and on the variations introduced into this field by buried metal masses.

The detector consists of a telescopic pole with a central section in aluminium and fibreglass extensions. The two probe-antennae which act as transmitter and receiver of the magnetic field are mounted at the ends of the extensions. Detection signals are provided by an audible tone and an LCD located on the front panel of the control unit.

The most significant features of the MIL D1/DS are the following:

- High sensitivity, useful for detecting metal masses at depth;
- High discrimination against shallow metal clutter;
- Compensation for mineralized soils and total immunity to the effects of the terrestrial magnetic field;
- High stability of its detection system, which shows no drift over time or with variations in environmental conditions;
- Intrinsic reliability and extremely high resistance to shock and mechanical stress, essential requirements for a long operating life.



TECHNICAL DATA

POWER SUPPLY	Types of batteries (4x), ANSI Standard, type D; 1.5V Alkaline (LR20) 1.2V Ni-MH rechargeable (>7000 mA/h)
BATTERY	Battery charge indicator
METAL ALARM	Adjustable sensitivity Audible alarm with adjustable volume and visual LCD display
DIMENSIONS	External diameter of probe head: 11" Length of telescopic handle: 63" Electronics unit: 8.5" x 6" x 3.2" Case: 37.5" x 17.5" x 6"
WEIGHT	Probe head and telescopic handle: 8.6 lbs Electronics unit (including batteries): 3.5 lbs Case: 17 lbs
ENVIRONMENTAL	Storage temperature: -67°F to + 167°F Operational temperature: -50.8°F + 149°F
LEVEL OF PROTECTION	MIL-D1/DS : IP68 (IEC 529) Case in High Impact Polypropylene: IP68 (IEC529)



CEIA USA provides complete support for technical and operational courses, given by certified personnel, either on site or at its own premises



CEIA USA Ltd - 9155 Dutton Drive, Twinsburg OHIO - 44087 USA
Phone: 330-405 3190 - Fax 330-405 3196 - Call 1-888-532-CEIA

© 2013 CEIA USA, Ltd. All rights reserved. CEIA USA reserves the right to make changes, at any moment and without notice, to the models (including programming), their accessories and options, to the prices and conditions of sale