



The E-360EE burden carrier is a UL Approved Type EE Powered Industrial Truck.


It stands out with superior maneuverability and safety. Rear batteries increase weight on the traction drive, enhancing the braking performance with a short stopping distance. Steering is smoother thanks to less weight on the front axle.

Low maintenance is guaranteed by dependable automotive differential and disc brakes, with large bolt-on discs.

## Benefits

RUGGEDNESS. Automotive ring gear differential, axle shafts on roller bearings.
DEPENDABILITY. Large automotive self-adjusting disc brakes.
MANEUVERABILITY. Short turning radius. Less weight on front axle.
COMFORT. Bucket seats on slide adjusters.
STURDINESS. 14-G diamond-plate steel, tubular frame.
DURABILITY. Optional bolt-on front bumper.



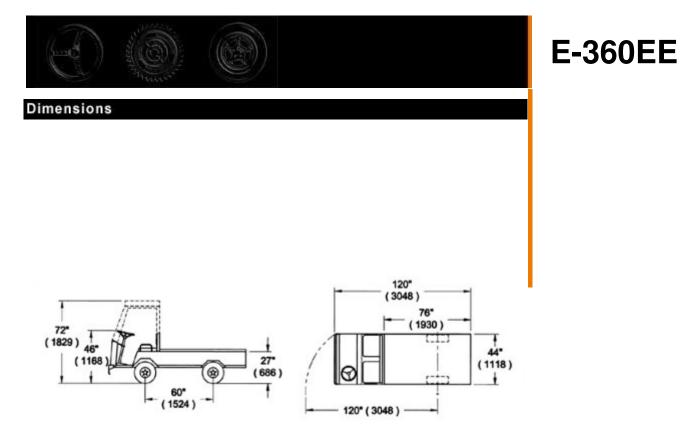

Technical spe		
Туре	36-volt Type "EE" Burden Carrier	
Capacity	*2,000 lb. (1 364 kg)	
Speed (Max)	10 mph (16 km/h)	and the second of the
Motor	10 hp	
Controller	Electronic speed controller	
Battery	Six 6V-220AH batteries	
Charger	25 amp, portable, automatic	
Transmission	GOODYEAR Eagle Synchronous drive	
Drive axle	Differential with automotive ring gear	Can and the second
Brakes	Rear hydraulic brakes, 11" diameter automotive discs	ALESS .
Steering	Automotive steering wheel	ALAN BURN
Suspensions	Dual leaf springs on front and rear	14-14 18
Seats	Two bucket seats on slide adjusters	
Indicators	Battery status indicator	
Safeties	Deadman seat switch, optional reverse alarm	
Lights	Dual head lights, dual tail/brake lights	
Accessories	Horn	R
Wheels	5.7x8 LRC pneumatic tires	
Unit Weight	1,500 lb. (682 kg) w Batteries	
Options	Reverse alarm.	
	Bolt-on front bumper, 1/4" plate steel.	
	Front disc brakes.	
	36VDC/12VDC converter for accessories. 6V-244AH	
	batteries.	
	Lift-out or roll-out battery box.	
	Digital battery status indicator, hour meter.	
	Maintenance meter. Strobe light. Turn signals.	HOTOF
	3000 lbs capacity with 8 mph gear ratio.	MOIKE
Standard	Conforms to requirements for Type EE as stated in O.S.H.A.	Industry driv
	standard section 1910.178 (Powered Industrial Trucks).	www.motrec.c
Notes	*includes 200 lb. per passenger. Specifications and	
	standard equipment are subject to change without notice.	