

SWITCHBOARD MATTING


INSULATIVE/NON-CONDUCTIVE • "BEST"

- **Sales Tip:** We highly recommend that the mat be replaced every 12 months for optimum performance.
- **Where to Specify:** : In front of high voltage boxes, electrical fuse boxes, transformers.

- Insulative PVC matting is formulated to provide insulation to the worker from being grounded thus preventing electrical shock.
- Each square foot of this matting is tested in conformance with ANSI/ASTM D-178 specifications and meets or exceeds the following:
 - Type 2 Compound: Polyvinyl Chloride
 - Class 2 Di-electric Strength: 30,000 volts
 - Proof test of 20,000 volts
 - Recommended maximum usage of 17,000 volts.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

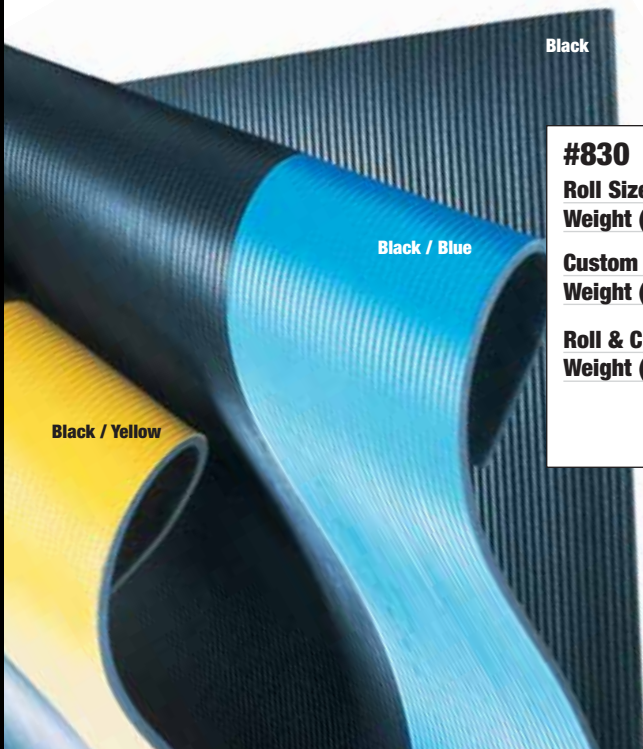

Black

Black / Blue

Black / Yellow

#830

Roll Sizes - Black	2' x 75'	3' x 75'	4' x 75'
Weight (lbs.)	255	385	500
Custom Sizes - Black	2' Widths	3' Widths	4' Widths
Weight (lbs.)	1.70/sq.ft.	1.70/sq.ft.	1.70/sq.ft.
Roll & Custom Sizes - Colored Borders	3' x 75'	3' Widths	
Weight (lbs.)	385	1.70/sq.ft.	

Shipping Location: Superior Manufacturing Group - Moselle, MS 39459



DIAMOND SWITCHBOARD MATTING

#831

INSULATIVE/NON-CONDUCTIVE • "BEST"



- **Sales Tip:** We highly recommend that the mat be replaced every 12 months for optimum performance.
- **Where to Specify:** : In front of high voltage boxes, electrical fuse boxes, transformers.

- Insulative PVC matting is formulated to provide insulation to the worker from being grounded thus preventing electrical shock.
- Each square foot of this matting is tested in conformance with ANSI/ASTM D-178 specifications and meets or exceeds the following:
 - Type 2 Compound: Polyvinyl Chloride
 - Class 2 Di-electric Strength: 30,000 volts
 - Proof test of 20,000 volts
 - Recommended maximum usage of 17,000 volts.



RESULTS from INDEPENDENT TEST LABS & PRESENTED as COMPARISONS to OTHER NoTRAX® INDUSTRIAL MATS

Black

Black / Yellow

#831			
Roll Sizes - Black	2' x 75'	3' x 75'	4' x 75'
Weight (lbs.)	255	385	500
Custom Sizes - Black	2' Widths	3' Widths	4' Widths
Weight (lbs.)	1.70/sq.ft.	1.70/sq.ft.	1.70/sq.ft.
Roll & Custom Sizes - Colored Borders		3' x 75'	3' Widths
Weight (lbs.)		385	1.70/sq.ft.
Shipping Location: Superior Manufacturing Group - Moselle, MS 39459			

