


1 3/8" Roller Conveyors

These 1-3/8" diameter gravity roller conveyors are extremely popular and are a standard in the industry. Ideal for the movement of light-medium weight packages. They are easily portable and can be used as a temporary or a permanent conveyor line. Poly covers available on 3" centers or more.



138-SR & 138-AR SERIES SPECIFICATIONS:

- Rollers: 1-3/8", 18 Ga. Galv./Alum. ♦ Axles: 1/4" Round, Spring Loaded
- ♦ Frame: 2-1/2" x 1" x 1", 12 Ga. Galv. or 1/8" Alum. Formed Channel
- ♦ 5 Cross Braces ♦ Hook and Bolt Couplers Standard ♦ Roller Cap. - Steel: 50 lbs, Alum.: 40 lbs ♦ 10' Frame Capacity - Steel: 50lbs/ft, Alum: 30lbs/ft
- ♦ 5' Frame Capacity - Steel: 200lbs/ft, Alum: 100lbs/ft

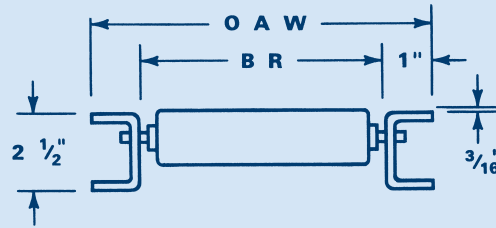

▶ 138-SR SERIES

Roller Centers In	Model No	Over-All Width In	Between Rail Width In	WEIGHT	
				5 Ft Section Lbs	10 Ft Section Lbs
1 1/2	138-SR-1512	12	10	49	98
	138-SR-1515	15	13	56	112
	138-SR-1518	18	16	67	130
	138-SR-1520	20	18	73	146
	138-SR-1524	24	22	87	168
3	138-SR-0312	12	10	33	65
	138-SR-0315	15	13	40	80
	138-SR-0318	18	16	43	82
	138-SR-0320	20	18	46	91
	138-SR-0324	24	22	53	101
4 1/2	138-SR-4512	12	10	27	53
	138-SR-4515	15	13	31	62
	138-SR-4518	18	16	36	68
	138-SR-4520	20	18	39	78
	138-SR-4524	24	22	43	83
6	138-SR-0612	12	10	25	49
	138-SR-0615	15	13	28	55
	138-SR-0618	18	16	33	62
	138-SR-0620	20	18	35	68
	138-SR-0624	24	22	37	71
12	138-SR-1212	12	10	25	46
	138-SR-1215	15	13	27	50
	138-SR-1218	18	16	29	53
	138-SR-1220	20	18	31	56
	138-SR-1224	24	22	33	60

▶ 138-AR SERIES

Roller Centers In	Model No	Over-All Width In	Between Rail Width In	WEIGHT	
				5 Ft Section Lbs	10 Ft Section Lbs
1 1/2	138-AR-1512	12	10	30	58
	138-AR-1515	15	13	34	68
	138-AR-1518	18	16	41	80
	138-AR-1520	20	18	43	89
	138-AR-1524	24	22	51	103
3	138-AR-0312	12	10	20	38
	138-AR-0315	15	13	22	43
	138-AR-0318	18	16	24	47
	138-AR-0320	20	18	26	50
	138-AR-0324	24	22	33	65
4 1/2	138-AR-4512	12	10	16	30
	138-AR-4515	15	13	18	36
	138-AR-4518	18	16	19	38
	138-AR-4520	20	18	20	39
	138-AR-4524	24	22	26	51
6	138-AR-0612	12	10	15	22
	138-AR-0615	15	13	18	32
	138-AR-0618	18	16	19	35
	138-AR-0620	20	18	20	37
	138-AR-0624	24	22	23	42
12	138-AR-1212	12	10	13	24
	138-AR-1215	15	13	15	27
	138-AR-1218	18	16	16	29
	138-AR-1220	20	18	17	31
	138-AR-1224	24	22	18	33