

# FREE-STANDING FIRE DEPT INLET CONNECTIONS

## SELECTION INFORMATION

**FUNCTION:** Used as an auxiliary inlet connection to supplement the fire protection water supply. Free-standing design is used on exterior fire lines piped vertically through grade.

**REGULARLY FURNISHED:** Cast brass angle body or red glossy polyester coated ductile iron angle body, size of outlet and number and type of inlets as selected by model number. 18" / 45.7 cm long polished brass cover sleeve; cast brass identification base plate, cast brass pin lug plugs and chains on each pin lug swivel.


**LETTERING AVAILABLE:**

- AUTO SPKR
- STANDPIPE
- DRY STANDPIPE
- AUTO SPKR STANDPIPE
- (Refer to page 5-8 for special lettering)

**VARIATION:**

Additional heights available. Specify height.

**SPECIFY:** Thread and lettering

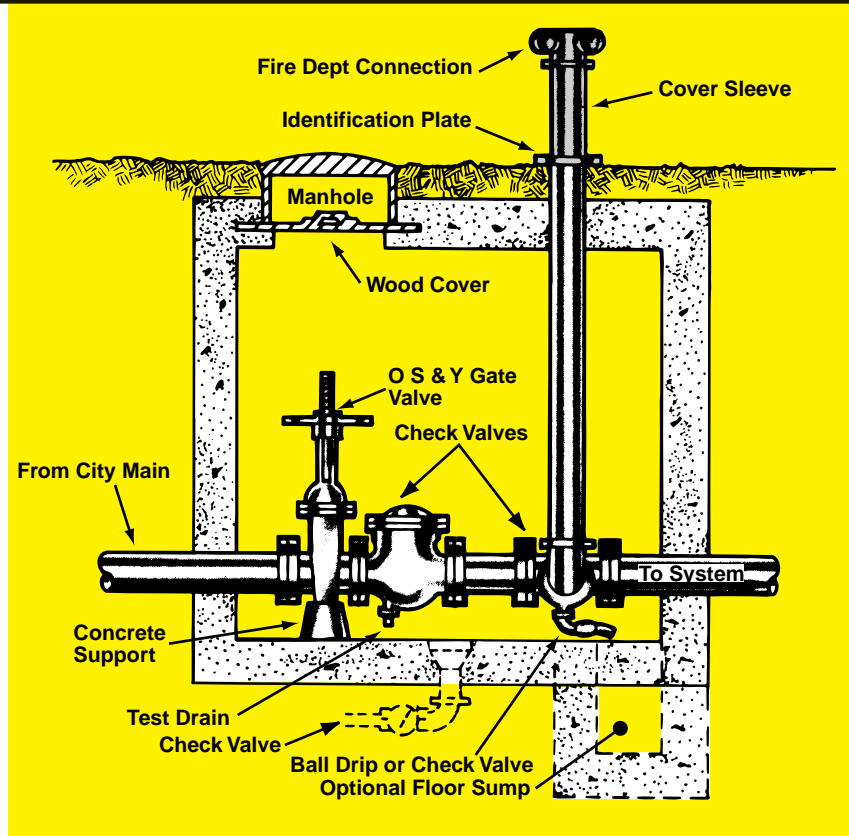

**5761-5764**

### TWO-WAY BRASS BODY WITH CLAPPERS

Model No.	Size	UL Listed
5761	4 x 2 1/2 10.2 x 6.4	YES
5762	4 x 3 10.2 x 7.6	NO
5763	6 x 2 1/2 15.2 x 6.4	NO
5764	6 x 3 15.2 x 7.6	NO

**Overall Height:** 24" / 61 cm

**Radius of Body Swing:** 7 1/8" / 18.4 cm

**OPTIONAL FINISHES:**

- B Polished Brass
- C Rough Chrome Plated  
Polished Chrome Plated Trim
- D Polished Chrome Plated

**SPECIFY:** Thread and lettering



**5771 & 5773**

### THREE-WAY BRASS BODY WITH CLAPPERS

Model	Size
5771 .....	.4" x 2 1/2" / 10.2 x 6.4 cm
5773 .....	.6" x 2 1/2" / 15.2 x 6.4 cm

**Overall Height:** 24" / 61 cm

**Radius of Body Swing:** 8" / 20.3 cm

**OPTIONAL FINISHES:**

- B Polished Brass
- C Rough Chrome Plated  
Polished Chrome Plated Trim
- D Polished Chrome Plated

**SPECIFY:** Thread and lettering

# FREE-STANDING FIRE DEPT INLET CONNECTIONS

## FOUR-WAY SQUARE WITH CLAPPER SNOOTS

### WITH BRASS BODY

Model **5775** Size **.6" x 2½"/15.2 x 6.4 cm**

#### OPTIONAL FINISHES:

- B Rough Brass Body  
Polished Brass Trim
- C Rough Chrome Plated Body  
Polished Chrome Plated Trim

### WITH DUCTILE IRON BODY

Model **5776** Size **.6" x 2½"/15.2 x 6.4 cm**

#### OPTIONAL FINISHES:

- B Red Glossy Polyester Coated Body  
Polished Brass Trim
- C Red Glossy Polyester Body  
Polished Chrome Plated Trim

**SPECIFY:** Thread and lettering **Overall Height:** 34"/86.3 cm **Radius of Body Swing:** 8"/20.3 cm



**5775 & 5776**

## FOUR-WAY SQUARE WITH CLAPPER BODY

### WITH BRASS BODY

Model **5780** Size **.6" x 2½"/15.2 x 6.4 cm**

#### OPTIONAL FINISHES:

- B Rough Brass Body  
Polished Brass Trim
- C Rough Chrome Plated Body  
Polished Chrome Plated Trim

### WITH DUCTILE IRON BODY

Model **5781** Size **.6" x 2½"/15.2 x 6.4 cm**

#### OPTIONAL FINISHES:

- B Red Glossy Polyester Coated Body  
Polished Brass Trim
- C Red Glossy Polyester Body  
Polished Chrome Plated Trim

**SPECIFY:** Thread and lettering **Overall Height:** 34"/86.3 cm **Radius of Body Swing:** 8"/20.3 cm



**5780 & 5781**

## FOUR-WAY WITH CLAPPER BODY

### WITH BRASS BODY

Model **5785** Size **.6" x 2½"/15.2 x 6.4 cm**

#### OPTIONAL FINISHES:

- B Rough Brass Body  
Polished Brass Trim
- C Rough Chrome Plated Body  
Polished Chrome Plated Trim

### WITH DUCTILE IRON BODY

Model **5786** Size **.6" x 2½"/15.2 x 6.4 cm**

#### OPTIONAL FINISHES:

- B Red Glossy Polyester Coated Body  
Polished Brass Trim
- C Red Glossy Polyester Body  
Polished Chrome Plated Trim

**SPECIFY:** Thread and lettering **Overall Height:** 26½"/67.3 cm **Radius of Body Swing:** 17"/43.1 cm



**5785 & 5786**

## SIX-WAY WITH CLAPPER BODY

### WITH BRASS BODY

Model **5791** Size **.6" x 2½"/15.2 x 6.4 cm**  
 Model **5792** Size **.8" x 2½"/20.3 x 6.4 cm**

**OPTIONAL FINISH:**  
 -C Rough Chrome Plated Body  
 Polished Chrome Plated Trim

**SPECIFY:** Thread and lettering **Overall Height:** 26½"/67.3 cm **Radius of Body Swing:** 25"/63.5 cm



**5791 & 5792**

**Note:** Model 5792 8"/20.3 cm furnished less base plate, with identification on sleeve.