

MODEL 126 Control Panel

Single phase, duplex alternating pump control with override.

The Model 126 control panel is designed to alternately control two 120, 208, or 240 VAC single phase pumps in water well installations. The alternating action provides alternation between two wells. In addition to the alternating pump control, this system provides override control to maintain system pressure upon high demand or should either pump fail.


PANEL COMPONENTS

1. Enclosure


Model 1260I000X: measures 10 x 8 x 4 inches (25.4 x 20.32 x 10.16 cm). Choice of NEMA 1 (steel for indoor use) or NEMA 4X (ultraviolet stabilized thermoplastic with removable mounting feet for indoor/outdoor use).

Model 1260I120X: measures 12 x 10 x 6 inches (30.48 x 25.4 x 15.24 cm). Choice of NEMA 1 (steel for indoor use) or NEMA 4X (ultraviolet stabilized thermoplastic with removable mounting feet for indoor/outdoor use).

2. **Magnetic Motor Contactors** (Model: 1260I120X) control pumps by switching electrical lines.
3. **HOA Switches** for manual pump control.
4. **Alternating Circuit Board** provides pump control and alternation (patented).
5. **Green Pump Run Indicator Lights**
6. **Field Wiring Label**
7. **Incoming Pump Power/Control Power Terminal Block**
8. **Pressure Switch Terminal Block**
9. **Control Power/Pressure Switch Terminal Block**
10. **Control Fuse**
11. **Control Relay** provides lag function.
12. **Ground Lugs**

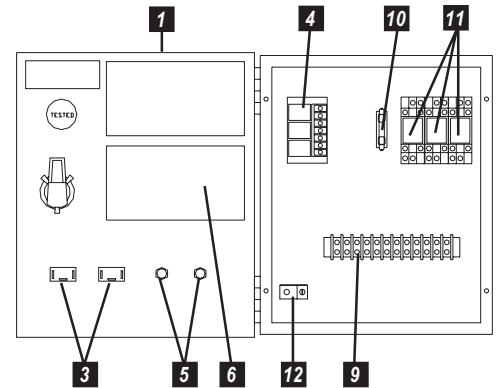

Model Shown 1260I000X
(without contactors)

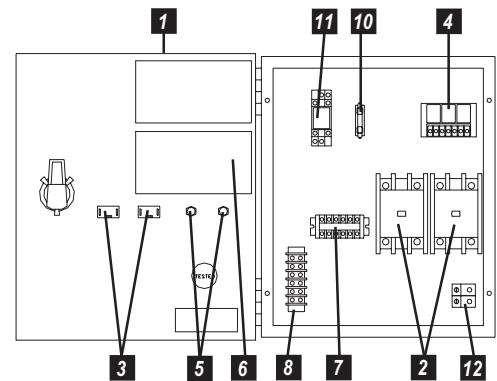

Model Shown 1260I120X
(with contactors)

PRICING/ORDERING INFORMATION

Model Number	VAC	FLA	NEMA Rating	List Price	Shipping Weight
1260I000X	120V	0	1	\$454.00	20 lbs.
1260I100X	120/208/240V	0-7	1	\$534.00	25 lbs.
1260I110X	120/208/240V	7-15	1	\$534.00	25 lbs.
1260I120X	120/208/240V	15-20	1	\$534.00	25 lbs.
1260I130X	120/208/240V	20-30	1	\$552.00	25 lbs.
1260W000X	120V	0	4X	\$504.00	15 lbs.
1260W100X	120/208/240V	0-7	4X	\$584.00	20 lbs.
1260W110X	120/208/240V	7-15	4X	\$584.00	20 lbs.
1260W120X	120/208/240V	15-20	4X	\$584.00	20 lbs.
1260W130X	120/208/240V	20-30	4X	\$602.00	20 lbs.

FEATURES

- Entire control system is UL Listed to meet and/or exceed industry safety standards
- Dual safety certification for the United States and Canada
- Complete with step-by-step installation instructions
- Three-year limited warranty



PO Box 1708, Detroit Lakes, MN 56502
1-888-DIAL-SJE • 1-218-847-1317
1-218-847-4617 Fax

email: sje@sjerhombus.com

www.sjerhombus.com

SEE BACKSIDE FOR COMPLETE LISTING OF AVAILABLE OPTIONS.

