



# Liberty has everything you need for your audio installation!

## Audio Connectec™ is Liberty's Revolutionary Compression Audio Connector Solution.

The same cutting-edge technology that Liberty developed for coax termination now makes this audio connector system an essential component of every residential audio installation.

Audio Connectec™ connectors slip on easily to the speaker cable conductor and compress on effortlessly with the easy-to-use Connectec™ tool.



BANANA PLUG

SPADE LUG

ANGLE PIN

CONNECTOR BASE

### CONNECTEC COMPRESSION TOOL

Perfect for all gauges of Liberty's speaker cables.

**Part #:**  
**CM-TOOL**



### PRODUCT HIGHLIGHTS

- Strip-Free
- Connector bases are available in 2 sizes: 10-12AWG or 14-16 AWG
- Works with all Liberty speaker cable
- 3 gold plated screw-on tips: banana, spade lug and angled pin
- Works with any speaker plug-in plate format or design
- For in-wall and non in-wall audio applications


Unique and ultra precise Sound Cone™ design fuses the audio connector directly to the speaker cable providing the lowest DB loss of any audio connector resulting in improved sonic fidelity and speaker performance.

DESCRIPTION	PART #
10-12 AWG Connector base	<b>CM-A-1P</b>
14-16 AWG Connector base	<b>CM-A-2P</b>
Banana Plug Tip Gold plated	<b>CM-APBA</b>
Spade Lug Tip Gold plated	<b>CM-APSL</b>
Angle Pin Tip Gold plated	<b>CM-APAP</b>
All items sold separately and in 25 pkg.	

### HEAT SHRINK & BOOTS


Tight and smooth edges. Available in black only. 25 pkg

**Part #:**  
**HSK-3:1BK-1/2**

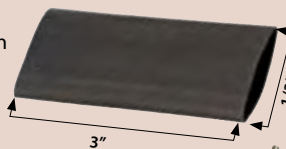

Perfect for finishing off your termination. Available in black. 25 pkg

**Part #:**  
**CM-BOOT-BLK**

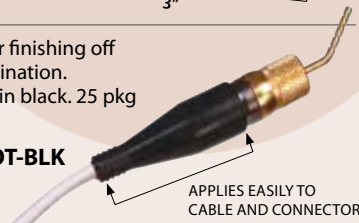

APPLIES EASILY TO CABLE AND CONNECTOR

## 5 EASY STEPS!



STEP 1

Cut the outer jacket away leaving the desired connector length. Slide heat shrink tube in to position and shrink.



STEP 2

Slide connector boots over each connector.



STEP 3

Without stripping, twist the correct AWG connector base clockwise on to the conductor.



STEP 4

Using the Connectec Tool- with the die set to the F connector position - compress the connector to the cable.



STEP 5

Slide boot over the connector base and screw the tip option on to the threaded connector base.

# 800-530-8998

THE AV PROFESSIONAL'S FIRST CHOICE.



LIBERTYCABLE.COM



Specifications Subject to Change