


Communication & Control Plenum Cables

Plenum Communication & Control Cable

Multiple Conductor/ Unshielded

22 AWG Plenecon II® Extra Flexible

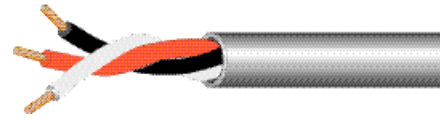

Applications:

Indoor within ducts, plenums and other spaces used for environmental air:

- Intercom Systems
- Security Systems
- Sound and Audio
- Background Music
- Power-limited Control Circuits

Description:

- ASTM Bare Copper • Polymer alloy insulation • Cabled construction • Overall plenum PVC jacket

Rating:

- NEC Type CMP
- (UL)-C(UL) Listed or c(ETL)us Listed
- Meets 300V requirements as specified in the NEC
- Flame Rating: NFPA-262 Smoke & Flame Test

Standard spool size 1000ft.

Catalog No.	No. of Cond.	Conductor Type & Nom. D.C.R	Insulation Type & Thickness	Shielding	Jacket Type & Thickness	Nom. O.D. Inches	NEC Type	Nom. Capacitance	Jacket Color
			Inches		Inches				
25231B	3	22 AWG (7x30) 17 Ω/Mft	Polymer alloy .010	None	Plenum PVC .015	.136	CMP	--	Gray
25241B	4	22 AWG (7x30) 17 Ω/Mft	Polymer alloy .010	None	Plenum PVC .015	.148	CMP	--	Gray
25855B	5	22 AWG (7x30) 17 Ω/Mft	Polymer alloy .010	None	Plenum PVC .015	.162	CMP	--	Gray
25270B	6	22 AWG (7x30) 17 Ω/Mft	Polymer alloy .010	None	Plenum PVC .015	.177	CMP	--	Gray
25271B	8	22 AWG (7x30) 17 Ω/Mft	Polymer alloy .010	None	Plenum PVC .015	.195	CMP	--	Gray
25272B	10	22 AWG (7x30) 17 Ω/Mft	Polymer alloy .010	None	Plenum PVC .015	.230	CMP	--	Gray
25273B	12	22 AWG (7x30) 17 Ω/Mft	Polymer alloy .010	None	Plenum PVC .015	.238	CMP	--	Gray
25274B New	15	22 AWG (7x30) 17 Ω/Mft	Polymer alloy .010	None	Plenum PVC .015	.260	CMP	--	Gray

Color Code		
Colors	Colors	Colors
1. Black	7. Orange	13. White/Black
2. Red	8. Yellow	14.. White/ Red
3. White	9. Purple	15. White/Green
4. Green	10. Gray	
5. Brown	11. Pink	
6. Blue	12. Tan	
JACKET: Gray		

Special Notes:

- Plenum Installation Precautions see Technical Reference Section Page 194
- Select cables are available in our Easybox®