

VP-8x8AK

8x8 Computer Graphics Video & Stereo Audio Matrix Switcher

NEW




Compatible with HDTV component video signals when used with a breakout cable such as the Kramer C-GM/3RVF.



The **VP-8x8AK** is a high-performance matrix switcher for computer graphics video signals, with resolutions up to and exceeding UXGA, and unbalanced stereo audio signals. The unit can route any combination of inputs and outputs and converts the audio to balanced stereo audio outputs.

FEATURES

- High Bandwidth - 360MHz (-3dB).
- HDTV Compatible.
- Kramer Kr-isp® Advanced Sync Processing - Ensures compatibility with a wide range of computers (even if the sync level is too low) by restoring the sync signal waveform.
- Memory Locations - Stores multiple switches as presets to be recalled and executed when needed.
- Take Button - Executes multiple switches all at once.
- Active Input Indication™ Reporting - Each input button on the front panel automatically lights up when the unit detects a video signal on that input.
- Delayed Switching™ Mode - Glitch-free switching of non-genlocked sources by setting the transition time of a switch from 0 to 3.5sec.
- DC Coupled Inputs and Outputs.
- Front Panel Lockout.
- Audio Level Controls - Each input and output.
- Flexible Control Options - Front panel, RS-232 (K-Router™ Windows®-based software is included), RS-485, Ethernet and IR remote (included), embedded Web page.
- Worldwide Power Supply - 100-240V AC.
- Standard 19" Rack Mount Size - 2U. Rack "ears" included.

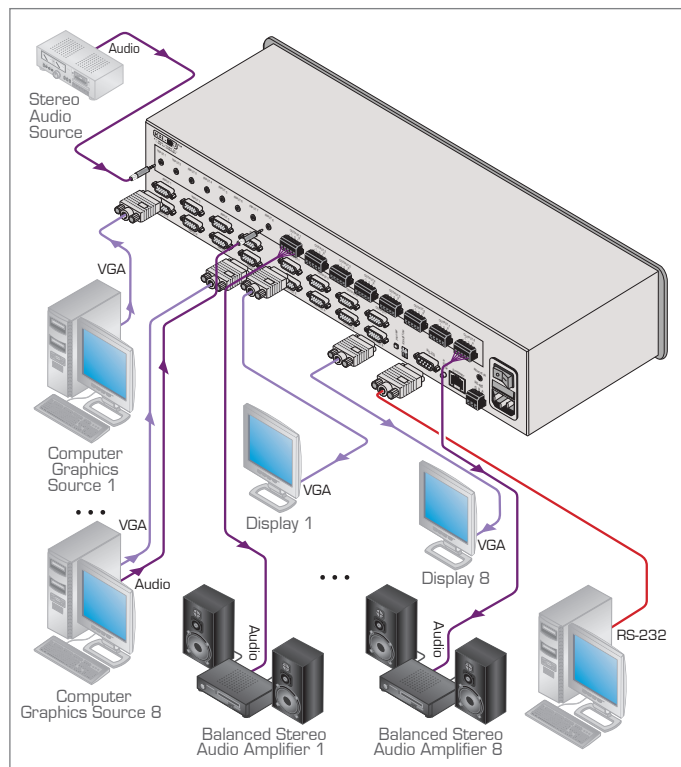

TECHNICAL SPECIFICATIONS

INPUTS:	8 XGA on 15-pin HD connectors (VGA through UXGA); 8 unbalanced stereo audio 3.5mm mini jacks.
OUTPUTS:	8 VGA on 15-pin HD connectors (VGA through UXGA); 8 balanced stereo audio terminal block connectors.
MAX. OUTPUT LEVEL:	Video: 2.3Vpp; Audio: 3.2dBu.
BANDWIDTH (-3dB):	Video: 360MHz; Audio: 22kHz.
DIFF. GAIN:	0.05%.
DIFF. PHASE:	0.05Deg.
K-FACTOR:	<0.05%.
S/N RATIO:	Video: 66dB @5MHz; Audio: 82dB.
CROSSTALK (all hostile):	Video: -52dB @5MHz; Audio: Bal: <-70dB @20kHz.
CONTROLS:	Input/output selector buttons, all, off, video, audio, AFV, store, recall, take audio level, and lock buttons. RS-232, RS-485, and Ethernet control. Input and output level control, infrared.
COUPLING:	Video: DC; Audio: AC.
AUDIO THD + NOISE:	0.24%.
AUDIO 2nd HARMONIC:	0.002%.
POWER SOURCE:	100-240V AC, 19VA.
DIMENSIONS:	19" x 7" x 2U W, D, H, rack mountable.
WEIGHT:	3.8kg (8.4lbs) approx.
ACCESSORIES:	Power cord, Windows® based control software, external remote IR receiver cable, rack "ears".

