



Commercial Post/Yard Hydrants

NON-FREEZE SANITARY POST/YARD HYDRANT



FIG. # 5904

Non-Freeze Sanitary Post/Yard Hydrant

SPECIFICATIONS:

- Complies with ASSE 1057


PRODUCT FEATURES:

- Canister prevents water in the casing from draining into the surrounding gavel/soil
- 3/4" (19) inlet and hose connection with Venturi adaptor
- Adjustable flow wheel lock handle
- Galvanized casing and stainless steel underground canister
- Meets "Sanitary" requirements for Health Departments and Plumbing Codes
- Field Testable
- Can be maintained without evacuation
- Hydrant is provided with a Bucket Handle Hook above the nozzle for ease of bucket filling
- Replacement parts are available in kit HPRK -9.



FUNCTION:

Used where an above ground water outlet is required in areas which are subject to freezing temperatures and where water is not allowed to drain from the casing into the ground. Freezing is prevented by burying the valve housing and cannister below the frost line and draining water from the casing after shut-off into the sealed cannister. The hydrant is engineered to be fully self contained and easily serviced in the field.

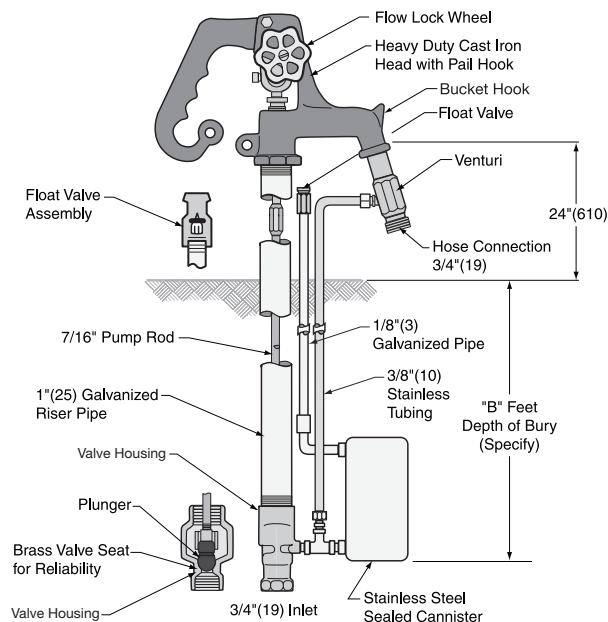

Regularly Furnished:
Non-Freeze Post Hydrant with Galvanized Casing, Adjustable Flow Wheel Lock Handle, Stainless Steel Underground Cannister and Nozzle with Venturi Adaptor.

NOTE: Dimensions shown in parentheses are in millimeters.

Variations:

- Vacuum Breaker -H