
NEW RoughDeck PC Pancake Deck Cargo Scale

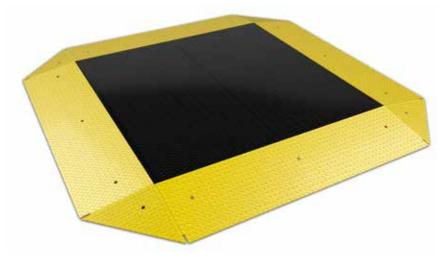

Specifications

End Load Capacity:

100% full scale at 20,000 lb

Cable Length:

20 ft (6.1 m) for connecting junction box to indicator

Threaded Eyebolt:

Four holes (3/4-10NC)

Warranty (limited):

RoughDeck PC weldment five years, load cells two years, all other components one year

The RoughDeck PC pancake cargo scale has wraparound ramps for easy vehicle access in all four directions. The PC pancake cargo scale is available as 10 x 10 feet with a capacity of 20,000 pounds.

Standard Features

- Top access JB4SS TuffSeal signal trim junction box
- Foot adjustment holes for leveling scale from above
- Four ball encapsulated feet
- Four IP66, alloy steel 10,000 lb load cells
- Epoxy paint for added protection. Ramps are painted yellow and scale is painted black to easily distinguish live weighing surface.
- 20ft Survivor EL147HE hostile environment load cell cable to connect scale to indicator. Cable can exit scale/ramp from any corner.
- Scale and wrap around ramps to access scale from all sides.
- · Ramps have integrated foot keeper plates to keep scale in check with ramps.
- · Holes in ramps to access internal anchor tabs from above. 16 anchor bolts at 3/4 in included
- · All surfaces, diamond tread

Part Number/Price

| Part # | Overall Size (W x L x H) | Capacity | Est. Weight | Price |
|--------|---|-----------|-------------|-------------|
| 194338 | Scale: 10 ft x 10 ft x 4 3/8 in Ramps: (4) 10 ft x 3 ft x 4 3/8 in Corners: (4) 4 ft 1 in x 3 ft x 4 3/8 in | 20,000 lb | 6,800 lb | \$17,650.00 |

| | Ν | EW |
|---------|----|----|
| RoughDe | ck | PC |

Pancake Deck Cargo Scale

| Dimensions | | | | | | |
|------------|---------|---|---------|--|--|--|
| Α | 120 in | С | 4.37 in | | | |
| В | 35.8 in | D | 0.38 in | | | |

