



Features

- Up to 200 lumens per foot and 90+ CRI
- 120V AC reels consume only 4 watts per foot
- Dimmable with most TRIAC dimmers
- Cuttable[†] every 4"
- Economical for larger installations - no need for a driver (164ft max run)
- cETLus Listed[†]
- Suitable for indoor and outdoor use
- 30,000 hours rated life

Available CCT



1800K-3000K

Dimming Options

- TRIAC

Listing / Ratings



Warm Dim Hybrid 3 Reels

Warm Dim Hybrid 3 combines the smooth transition of warm dim technology, high light output, and outdoor use into one unique and robust linear lighting solution. At full brightness Warm Dim Hybrid 3 has a CCT of 3000K. As it is dimmed the CCT smoothly transitions down to 1800K.

Technical Information


Series	120-H3WD
Input Voltage	120V AC
CCT	1800K-3000K
CRI	90+
Wattage	4W per ft
Lumens	Up to 200Lm per ft
Max Run	164 feet (50m) (not recommended to exceed 75 feet in any single run)
Cuttable	Every 4" (101.6mm)
IP Rating	IP65**, Wet Locations
Dimmable	TRIAC (10-100%*)
Rating	cETLus Listed [†] for indoor/outdoor use, Wet locations
Rated Life	30,000 hrs

*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers.

**IP65 rated only when used with pre-attached molded power cord and end cap is either pre-attached or properly sealed with dielectric grease & silicone.

[†]ETL Listing is void if product is cut.

[‡]Do not install in inclement weather or extreme temperature conditions (i.e. -25°C (-13°F) and below)

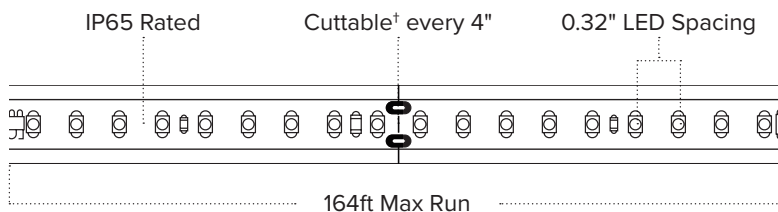



WARM DIM HYBRID 3 ORDERING INFORMATION

ITEM NUMBER	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
120-H3WD-3018	1800K-3000K	150 ft	200Lm / ft	4W / ft	IP65	90+	4" (102mm)

Includes (4) 120-H3-CONKIT and (50) 120-H3-CLIPS

WARM DIM HYBRID 3 ACCESSORIES

ITEM NUMBER	DESCRIPTION
120-H3-CONKIT	Power connection kit w/Plug
120-H3-JUMP.5	6" linking cable
120-H3-JUMP3	3' linking cable
120-H3-JUMP6	6' linking cable
120-H3-SPL	In-line splice
120-H3-END	End cap
120-H3-CLIPS	Mounting clips (qty 10)
120-H3-SCLIPS-22	Saddle Mounting clips (qty 22)
120-H3-CHAN-3	1m aluminum channel
120-H3-CHAN2-3	1m aluminum deep channel with lens



120-H3-CONKIT



120-H3-JUMP.5
120-H3-JUMP3
120-H3-JUMP6



120-H3-SPL



120-H3-END




120-H3-CLIPS



120-H3-SCLIPS-22



120-H3-CHAN-3



120-H3-CHAN2-3